

# NOVA CHAIN BLOCK



0.5 to 20t

Overload protection available

Complies with ASME B30.16




- Triple spur gear
- High quality heat treated alloy steel load chain
- Light weight for portability
- Hand chain is zinc treated and 3 foot less than lift
- Hooks are forged heat treated steel
- Models with overload protection are a darker orange for easy recognition
- Safety orange finish with capacity markings



# NOVA CHAIN BLOCK



## TECHNICAL SPECS

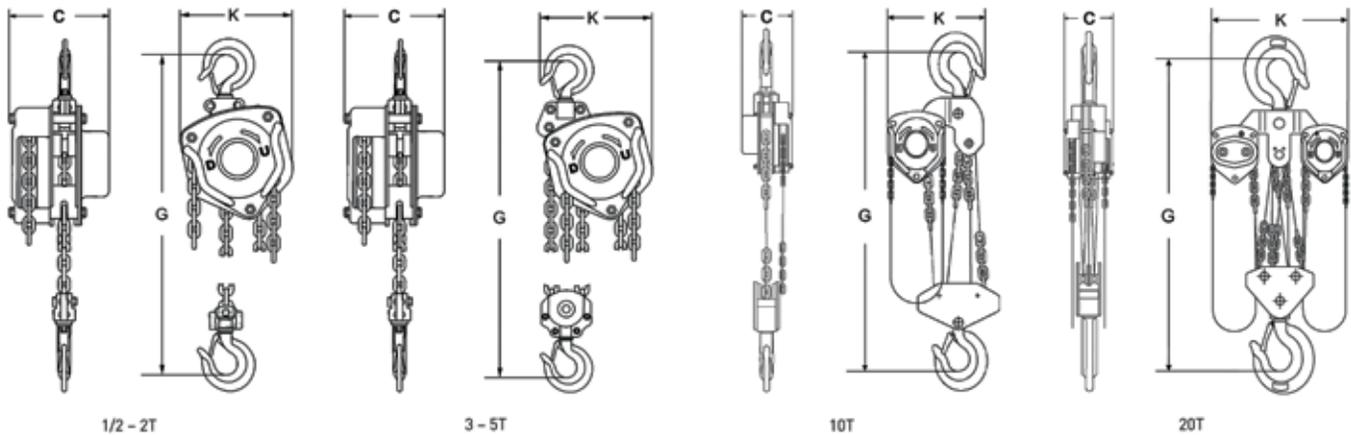

MODEL	Cap. Tons	Safe working load	Test load	Standard lift	No. of chain falls	C	G Headroom	K	Net weight
		lb	tons	ft		in	in	in	lb
NB1/2T	1/2	1 102	0,75	10	1	5 1/8	11 1/4	5	21
NB1T	1	2 204	1,5	10	1	5 1/2	13 3/4	6 1/4	26
NB1.5T	1.5	3 306	2,25	10	1	6 3/8	16 3/8	6 7/8	40
NB2T	2	4 409	3	10	1	6 3/8	16 1/2	7 3/8	41
NB3T	3	6 613	4,5	10	2	6 3/8	19 3/4	7 7/8	59
NB5T	5	11 023	6,25	10	2	7 3/8	25 1/4	10	101
NB10T	10	22 046	12,5	10	4	8 1/8	31 1/2	15 5/8	183
NB20T	20	44 092	25	10	8	8 1/2	35 1/8	25 5/8	425