

ADJUSTABLE PUSH TROLLEY



NOVA MANUAL ADJUSTABLE TROLLEY:


Perfectly combines design and ease to use

Capacity from 1T to 5T

One year warranty

Meets ASME B30.11

Testing and inspection certificate included

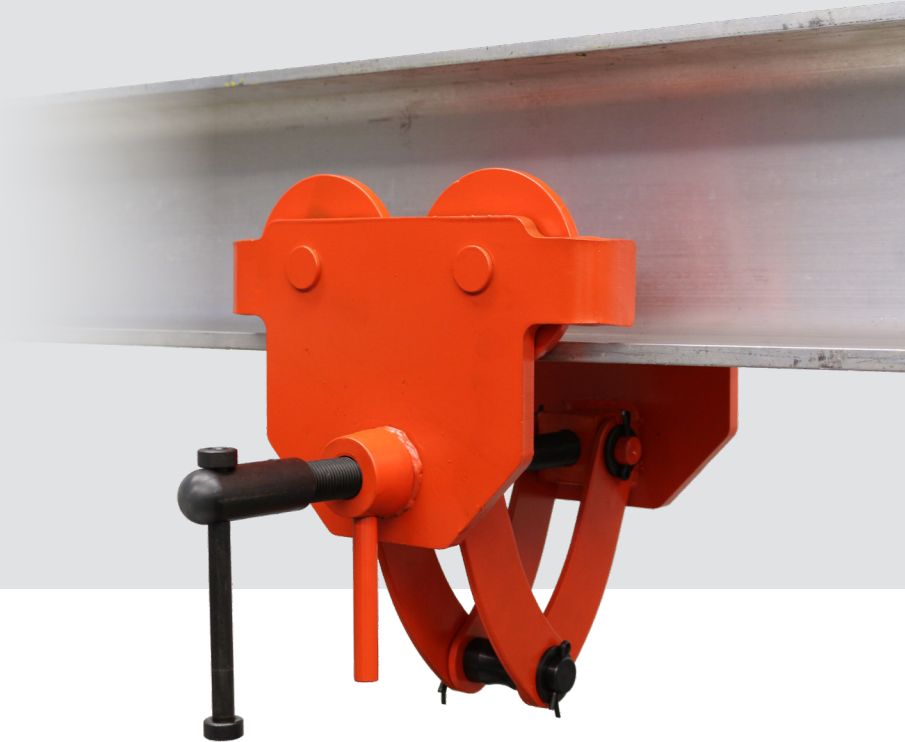

Quick and easy installation

- No tools required
- Can be easily moved from one beam to another
- Ideal for temporary installations like those for maintenance

Safe



- Locking system prevents the adjustment screw from loosening
- Drop stops
- Tested at 150% of working capacity

Robust design

- High strength powder coat paint
- Low friction ball bearings

Compatible

- Adjustable to large array of beam sizes
- Universal wheels fit standard beam profiles



ADJUSTABLE PUSH TROLLEY



MODEL	Capacity		Test load 150% (lbs)	A	B		C	D	E	F	∅	Net weight (lb)	Min. curve radius
	TM	lbs			Min	Max							
NAT1T	1	2200	3300	14.0	2.5	8.0	1.8	9.5	11.7	0.12	0.87	18	39.4
NAT2T	2	4400	6600	14.2	3.0	8.0	2.2	11.1	12.5	0.12	0.87	44	43.3
NAT3T	3	6600	9900	14.2	3.0	8.0	2.4	12.9	13.8	0.12	0.94	73	51.2
NAT5T	5	11000	16500	18.5	3.9	12.0	2.8	14.8	17.9	0.18	1.10	132	78.8
NAT10T	10	22000	33000	18.9	5.9	12.0	2.8	17.9	19.7	0.18	1.65	-	118.1

All measurements displayed in inches.

