

STAINLESS STEEL CHAIN BLOCK

SERIES **XTS**



2 YEARS WARRANTY

Compliant with ASME B30.16

TECHNICAL SHEET

1/4T to 5T

Hoist made of AISI 304 Stainless Steel

Load and hand chain made of Stainless Steel

Mechanical parts are lubricated with food grade grease
(Meets NSF-H1)

Automatic double pawl braking system

Tested at 1500 cycle lift


Overload protection included



Don't forget your
stainless steel trolley!



TECHNICAL SPECS

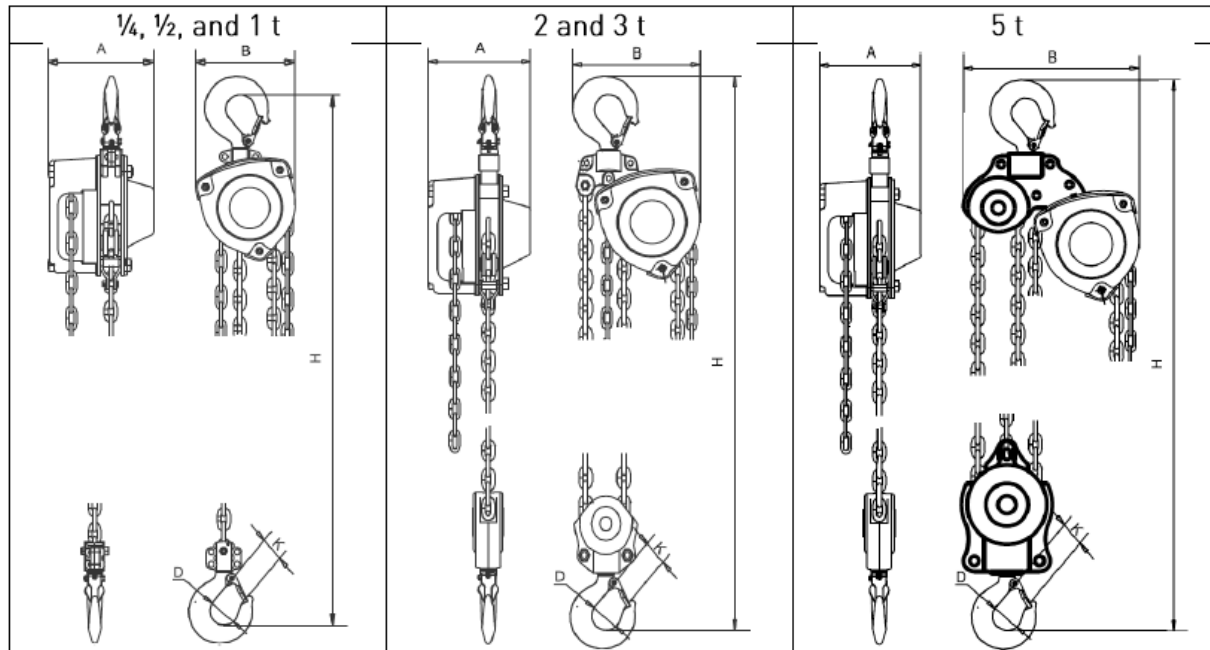

Model	Capacity, Metric Ton [lb; short ton; kg]	Effort for lift rated capacity (lbf)	Ø lifting chain (mm)	Number of falls	Weight* (lb)	Weight/extra ft (lb)	Dimensions, mm (in)				
							A	B	D	K	H min
SB0.25T	0.25 [551; 0,27; 250]	45	4,0	1	8,8	0,27	4,13	4,29	1,26	1,06	9,8
SB0.5T	0.5 [1102; 0,55; 500]		7,1	1	26,7		1,32	5,98	6,3		1,61
SB01T	1.0 [2204; 1,10; 1000]	68	7,1	2	28,2	2,08				6,57	1,97
SB02T	2.0 [4409; 2,20; 2000]	70	9,0	2	42,3		2,08	7,3	2,01		1,50
SB03T	3.0 [6613; 3,30; 3000]	72	9,0	2	69,2	2,76	6,57	9,1	2,24	1,54	22,2
SB05T	5.0 [11023; 5,51; 5000]	86	9,0	3	90,4						

* For a chain block with 10' of lift.